
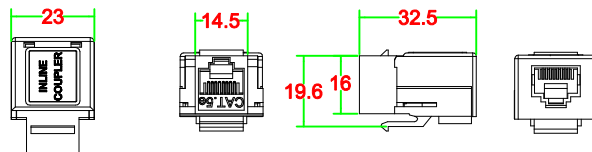

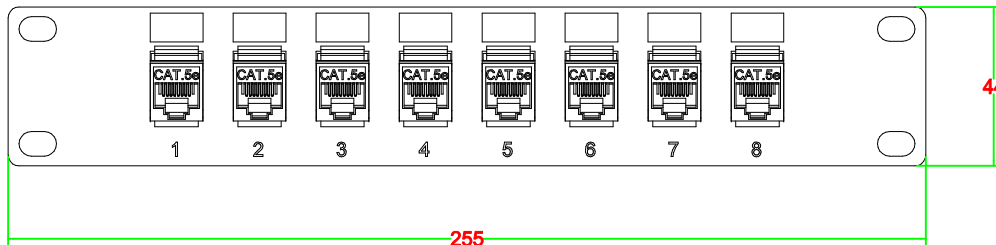
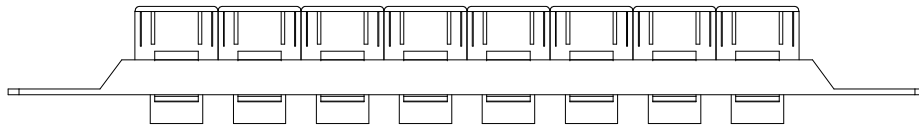


10" Cat.5e UTP Feed Through Patch Panel (8 Ports)

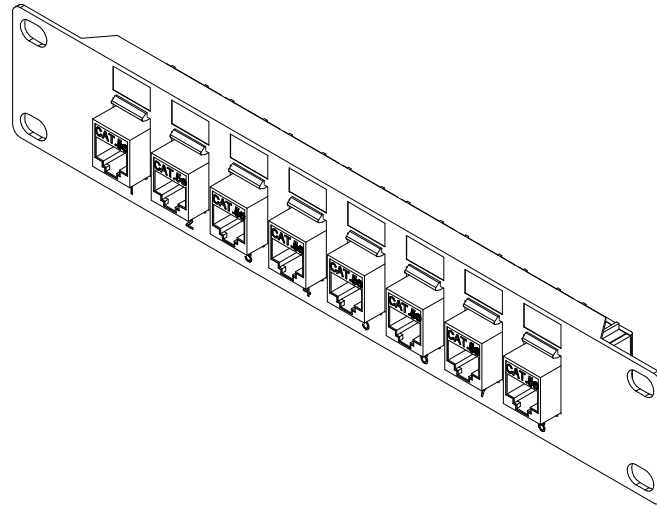

Performance:

Meets Cat.5e EIA/TIA 568B.1 Standard.

Materials:

Panel : Metallic Panel (SPCC)

Plastic Body : Fireproof ABS UL-94V0

Plastic Cover : Fireproof ABS UL-94V0

RJ-45 Jack : 8P8C 50 micro inches gold plated

PCB : FR-4 / 1.0mm UL-94V0

Electrical Specifications:

Insulation Resistance : 500M ohms (min.)

Contact Resistance : 20m ohms (max.)

Current Rating : 1.5 Amps .

DC Resistance : 0.1 ohm (max.)

Withstanding Voltage : 1000 VAC RMS @ 60Hz / 1 min.

Mechanical Specifications:

RJ-45 Jack Insertion Cycle : Over 2000 Cycles (min.)

Operation Temperature : -40 ~ +70 degree / C

DRAW NO:		ITEM NO:	PLK-08X-10"+EIC-UKTX*8
	APPR	CUSTOMER:	
UNIT: m/m	CHECK	DATE:	
SCALE: 1:1	DESIGN	TOLERANCE:	· ± 1 · X ± 0.2 · XX ± 0.15
EPNEW ELECTRONICS CO.,LTD. HIGH QUALITY ELECTRONICS CO.,LTD.			