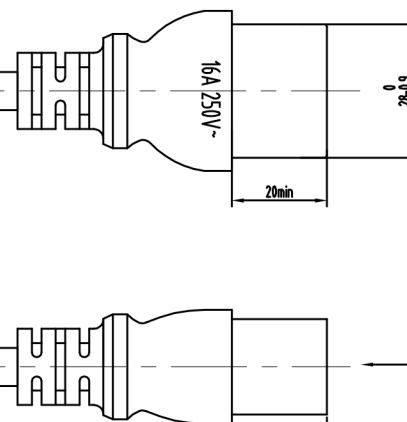
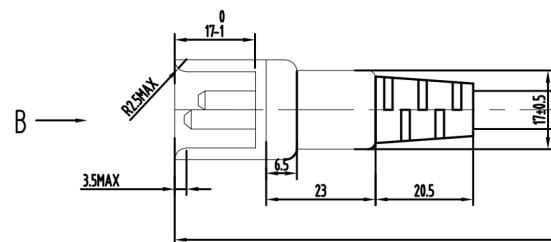
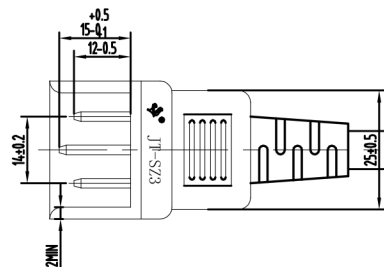


Notes;

1.Plug: JT-SZ3 16A 250V~ Clear injeuction, no scrath and dirt

2. Cable: H05VV-F 3X1.5 mm² Jacket $\phi 8.1 \pm 0.1$ Conductor 48x0.2,
Core $\phi 3.1 \pm 0.1$

Cable Mark: $\triangleleft$ VDE $\triangleright$ H05VV-F 3X1.5mm²

3. Test: Hi-Pot : Inner Voltage AC2500V/1S, External Voltage AC6000V/1S, current leakage 1mA, insulation resistance no less than 50M Ω , no strike out

2	FA70	H05VV-F 3G1.5mm ²		400±10mm	Black
1	FA71	H05VV-F 3G1.5mm ²		1800±10mm	Black
Item	Customer Model	Model/No.		Length(mm)	Color

BUY ON

www.cablematic.com

P.N	Item	JT-SZ3/JT-ST6			Drw. N	JT-YP-31313
Dre By					Date	2016. 9. 24
Check By	$\pm 0.15 \times \pm 0.15$ $\times \pm 0.25 \times \pm 0.25$ $\times \pm 0.38 \times \pm 0.38$	比例	1 : 1		mm	
		投影				