


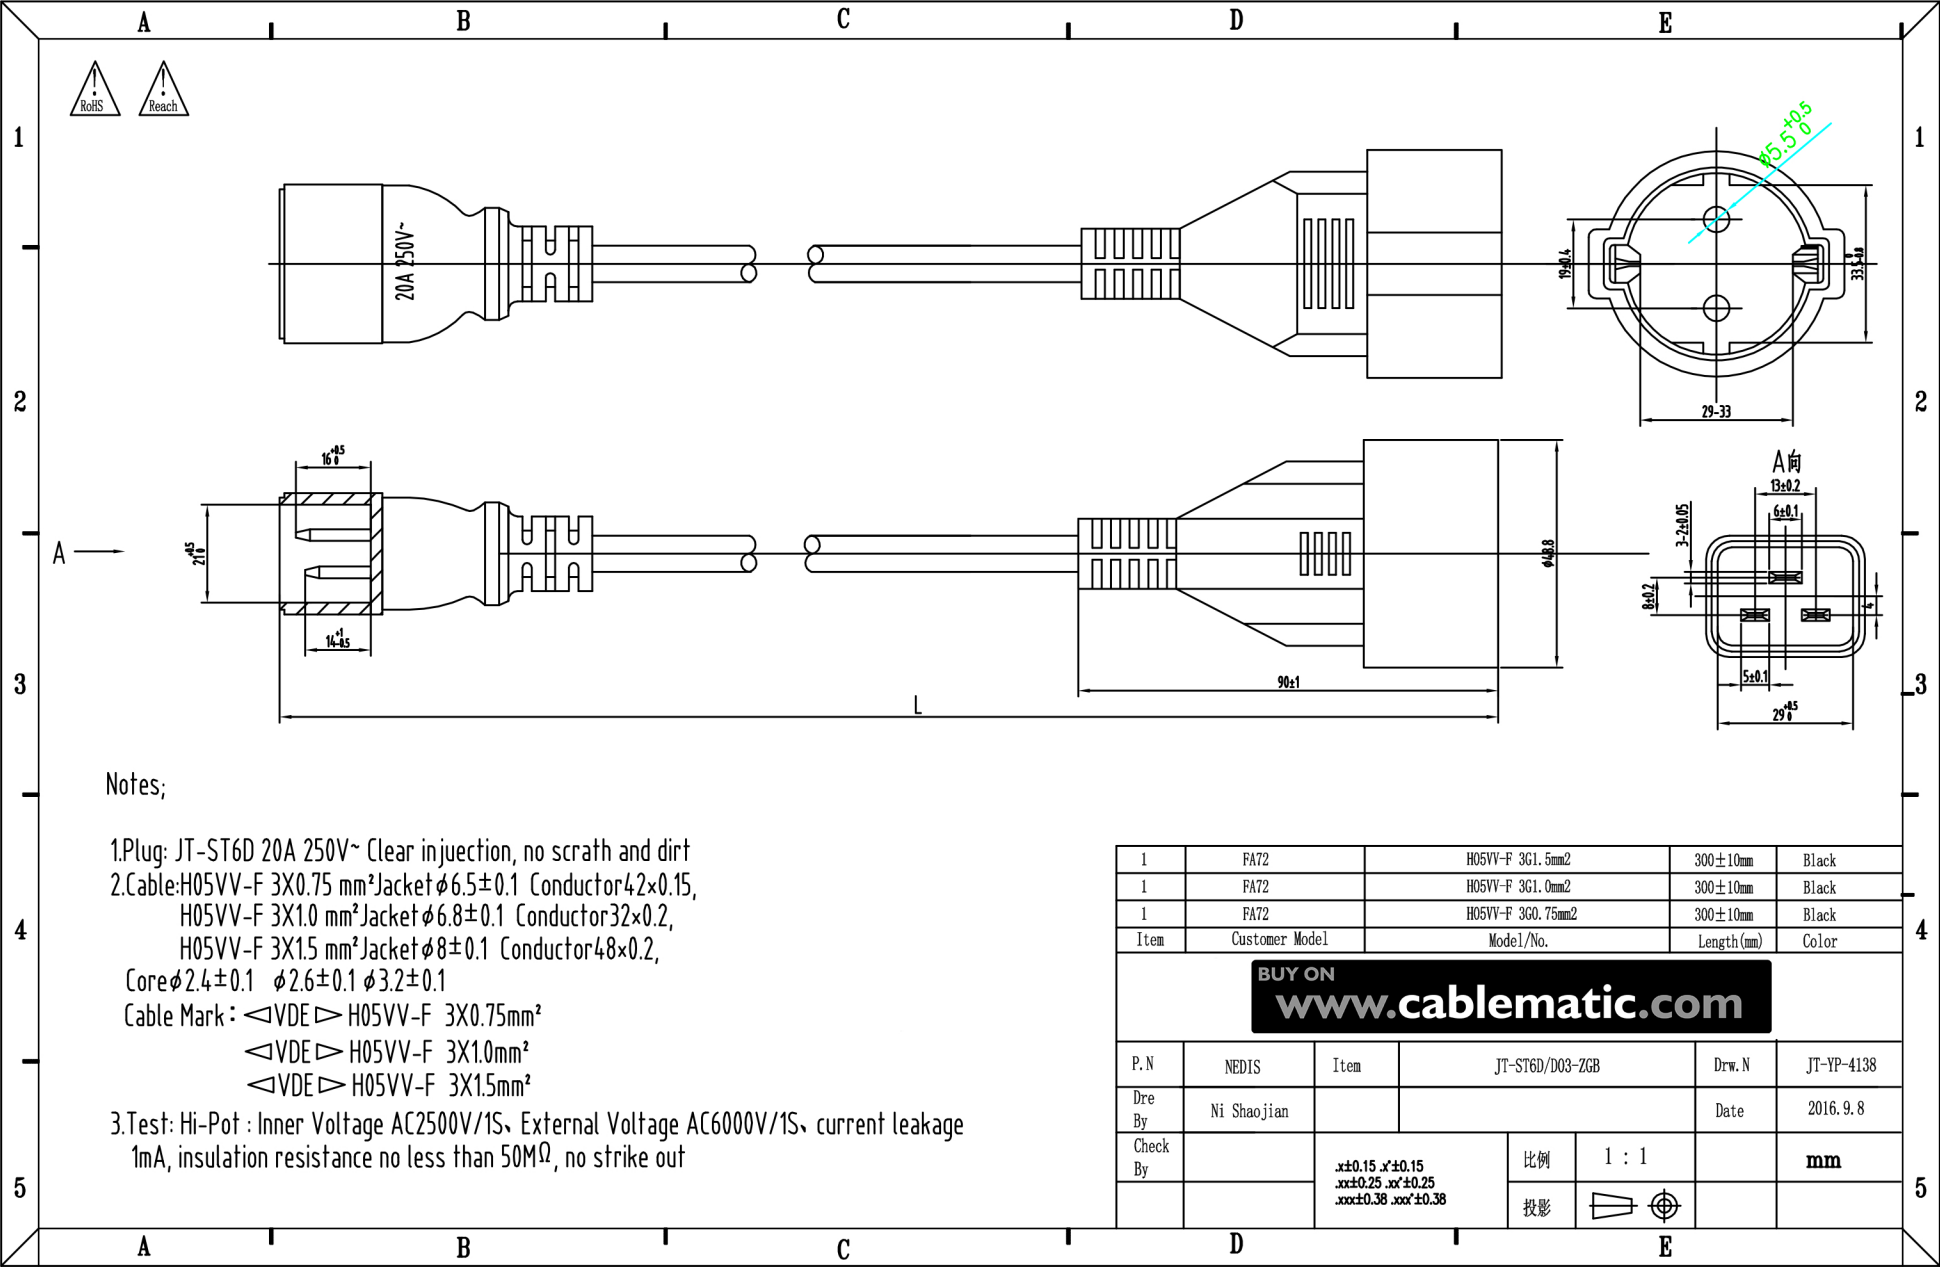

Notes;

- 1.Plug: JT-ST6D 20A 250V~ Clear injeuction, no scrath and dirt  
2.Cable:H05VV-F 3X0.75 mm<sup>2</sup>Jacket $\phi 6.5\pm 0.1$  Conductor $42\times 0.15$ ,  
H05VV-F 3X1.0 mm<sup>2</sup>Jacket $\phi 6.8\pm 0.1$  Conductor $32\times 0.2$ ,  
H05VV-F 3X1.5 mm<sup>2</sup>Jacket $\phi 8\pm 0.1$  Conductor $48\times 0.2$ ,  
Core $\phi 2.4\pm 0.1$   $\phi 2.6\pm 0.1$   $\phi 3.2\pm 0.1$   
Cable Mark : <VDE> H05VV-F 3X0.75mm<sup>2</sup>  
<VDE> H05VV-F 3X1.0mm<sup>2</sup>  
<VDE> H05VV-F 3X1.5mm<sup>2</sup>  
3.Test: Hi-Pot : Inner Voltage AC2500V/1S、 External Voltage AC6000V/1S、 current leakage  
1mA, insulation resistance no less than 50M $\Omega$ , no strike out

|                                                 |                |                                                             |                 |                                                                                       |            |
|-------------------------------------------------|----------------|-------------------------------------------------------------|-----------------|---------------------------------------------------------------------------------------|------------|
| 1                                               | FA72           | H05VV-F 3G1.5mm2                                            | 300±10mm        | Black                                                                                 |            |
| 1                                               | FA72           | H05VV-F 3G1.0mm2                                            | 300±10mm        | Black                                                                                 |            |
| 1                                               | FA72           | H05VV-F 3G0.75mm2                                           | 300±10mm        | Black                                                                                 |            |
| Item                                            | Customer Model | Model/No.                                                   | Length(mm)      | Color                                                                                 |            |
| <div>BUY ON</div> <div>www.cablematic.com</div> |                |                                                             |                 |                                                                                       |            |
| P. N                                            | NEDIS          | Item                                                        | JT-ST6D/D03-ZGB | Drw. N                                                                                | JT-YP-4138 |
| Dre By                                          | Ni Shaojian    |                                                             |                 | Date                                                                                  | 2016.9.8   |
| Check By                                        |                | x±0.15 x'±0.15<br>xxx±0.25 xxx'±0.25<br>xxxx±0.38 xxx'±0.38 | 比例              | 1 : 1                                                                                 | mm         |
|                                                 |                |                                                             | 投影              |  |            |