BUY ON
www.cablematic.com

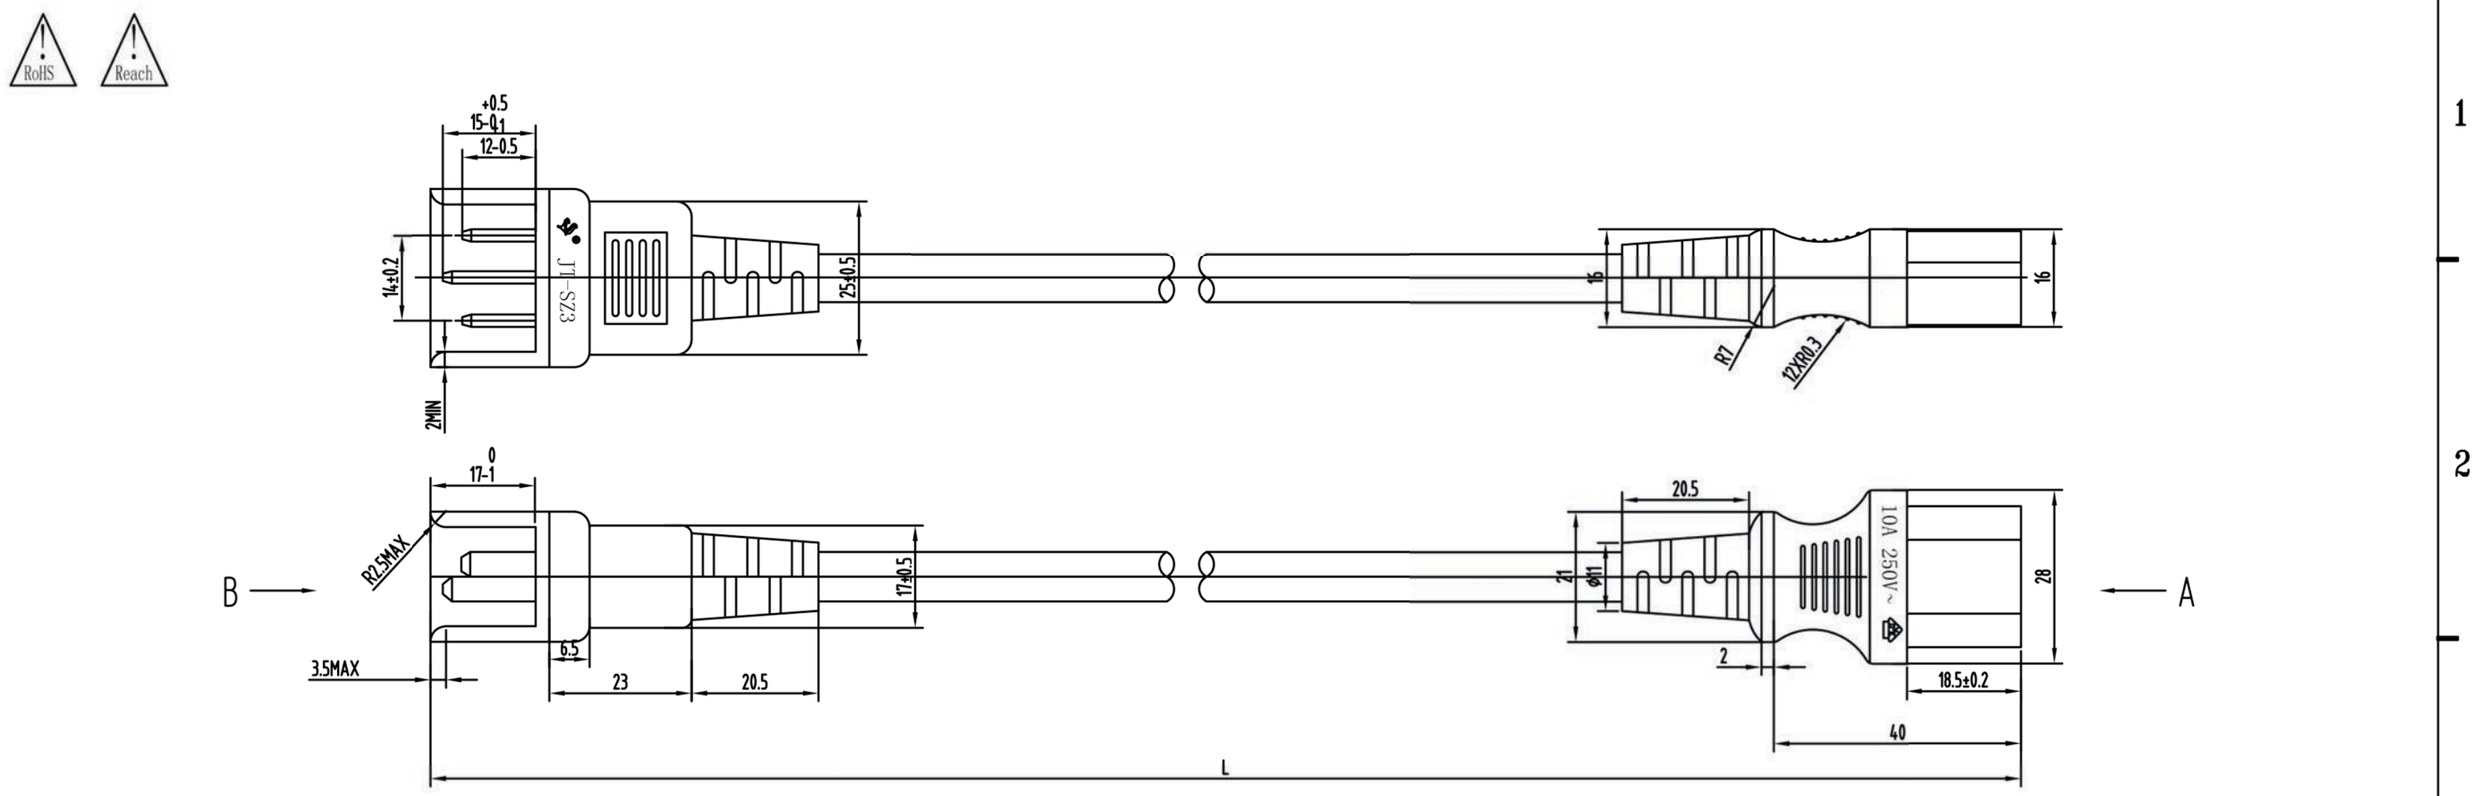


B-B




A-A

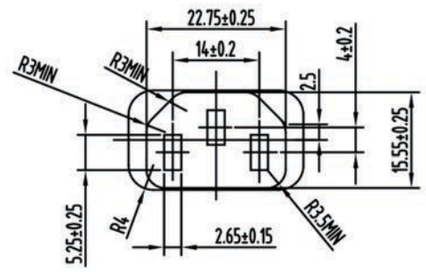


Notes;

1.Plug: JT-SZ3 10A 250V~ Clear injuection, no scrath and dirt
2.Cable:H05VV-F 3X1.0 mm² Jacket φ6.8±0.1 Conductor32×0.2,
Core φ2.6±0.1 φ2.4±0.1
Cable Mark: ⊲VDE⊳ H05VV-F 3X1.0mm²
3.Test: Hi-Pot : Inner Voltage AC2500V/1S、External Voltage AC6000V/1S、current leakage 1mA, insulation resistance no less than 50MΩ, no strike out

| Item | Customer Model | Model/No. | Length(mm) | Color |
|---|---|---|---|---|
| 11 | CH30 | H05VV-F 3G1.0mm2 | 500±10mm | Black |
| 10 | CH29 | H05VV-F 3G1.0mm2 | 300±10mm | Black |
| 9 | CH28 | H05VV-F 3G1.0mm2 | 25000±50mm | Black |
| 8 | CH27 | H05VV-F 3G1.0mm2 | 20000±50mm | Black |
| 7 | CH26 | H05VV-F 3G1.0mm2 | 15000±50mm | Black |
| 6 | CH25 | H05VV-F 3G1.0mm2 | 10000±50mm | Black |
| 5 | CH24 | H05VV-F 3G1.0mm2 | 7500±50mm | Black |
| 4 | CH23 | H05VV-F 3G1.0mm2 | 5000±50mm | Black |
| 3 | CH22 | H05VV-F 3G1.0mm2 | 3000±30mm | Black |
| 2 | CH21 | H05VV-F 3G1.0mm2 | 1800±15mm | Black |
| 1 | CH20 | H05VV-F 3G1.0mm2 | 1000±10mm | Black |

| | | | | | |
|---|---|---|---|---|---|
| P.N | | Item | JT-SZ3/JT-ST3 | Drw.N | JT-YP-03135 |
| Dre By | Ni Shaojian | | | Date | |
| Check By | | .x±0.15 .x'±0.15 .xx±0.25 .xx'±0.25 .xxx±0.38 .xxx'±0.38 | 1 : 1 | | mm |